




RALLYTRAK RX™

Accumulation Tables for Pharmaceutical Environments

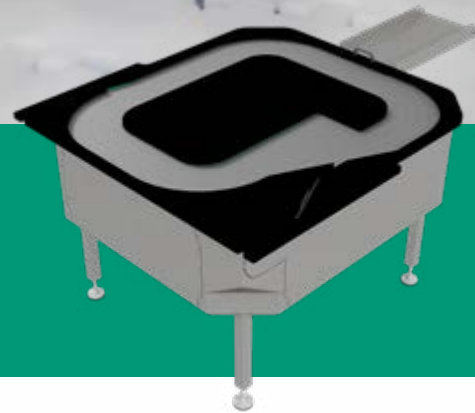

H&S

HANDLING &
STERILIZING

> Ideal for Rotary Table Replacement

RallyTrak RX™ by Shuttleworth is a smart, low-pressure alternative to traditional rotary or turntable accumulators. Sharing the same footprint as a standard rotary table, the 48" RallyTrak RX™ delivers faster outfeed, minimal noise, and significantly reduced line pressure—ensuring gentle, damage-free handling of even the most fragile vials. It efficiently manages up to 350 vials per minute (VPM), making it ideal for high-speed pharmaceutical applications.

Engineered for simplicity, reliability, and low operational cost, RallyTrak RX™ was developed with the pharmaceutical industry in mind but works perfectly for a wide range of small delicate products. With Shuttleworth's focus on performance and product protection, RallyTrak RX™ maximizes throughput while minimizing risk, helping safeguard both your products and your bottom line.

FEATURES AND BENEFITS

- **Maximize Throughput** – Outfeeds faster than traditional rotary tables
- **Gentle Handling** – With near zero line pressure, crushing, marring, and damage are no longer an issue
- **Smart Design** – Minimal cost for maintenance and low cost of ownership ensures a quicker return on investment
- **Flexible Functionality** – Flow control, single file, multi-lane, & FIFO

Available in standard 3 standard sizes, the RallyTrak Rx Accumulation Table can be configured with three (SRx3), five (SRx5), and seven (SRx7) chains depending on capacity needs.

| STANDARD SPECIFICATIONS | |
|-------------------------|----------------------------|
| Length | 54" |
| Width | 48" (SRx 5) |
| Elevation | 30" - 42" |
| Electrical | 480V 3PH 20amp |
| Air | 60psi 5 CFM* |
| Rate | Up to 350 vials per minute |

OPTIONS

- **Drive:** Powerflex 525
- **Controls:** Locally mounted VFD

*Air only required with on systems with product release gate

CONSTRUCTION

- **Frame:** 304 stainless-steel
- **Surface:** 85mm plastic chain
- **Support:** Square tubing stainless-steel
- **Motor:** Inverter rated fixed speed multi-voltage motor (208-230/460v, 3-PH, 60Hz). Mounted
- **Guides:** Plastic

APPLICATIONS

- **Vial Size:** 2mL - 50mL
- **Product Material:** Glass & Plastic
- **Infeed:** Single file, Multi-lane, & Mass flow
- **Discharge:** Single file outfeed, Multi-lane outfeed, & Mass outfeed

