



## EC-CONVEYOR

EMPTY CASE HANDLING FOR  
LABELING APPLICATIONS



H&S

HANDLING &  
STERILIZING

### Adjustable conveyor solution stabilizes empty cases during labeling


Designed to streamline your labeling process, the Shuttleworth Empty Case Conveyor (EC-Conveyor) offers unparalleled versatility for front, side, and corner wrap labeling of empty cases. Seamlessly integrating with your label applicator, EC-Conveyor ensures precise alignment and smooth conveyance, eliminating any potential disruptions during the labeling operation.

Catering to case widths ranging from 5.75 to 16 inches, EC-Conveyor's v-guided belt provides a reliable grip on empty cases, firmly securing them against our Shuttleworth roller guide for stable transportation through the labeling station. Equipped with pre-tapped holes for sensor mounts, standard VFD, and a compact design, EC-Conveyor adapts seamlessly to both new and existing empty case labeling setups, offering a flexible solution tailored to your specific needs.


#### FEATURES AND BENEFITS

- V-Guided belt and roller guide securely transports your case through the labeling application preventing misalignment from pressure or contact from the labeler.
- Hand wheel offers precision width adjustment for empty case labeling from 5.75 to 16 inches. Visual indicator lets you adjust to the perfect width without measuring
- Compact design easily integrates with new or existing empty case labeling applications.
- Gently and securely transports your case without crushing or marring.
- Pre-tapped holes for sensor mount
- Standard VFD for belt speed adjustment
- Left and right hand configurations available.

## DESIGN FEATURES

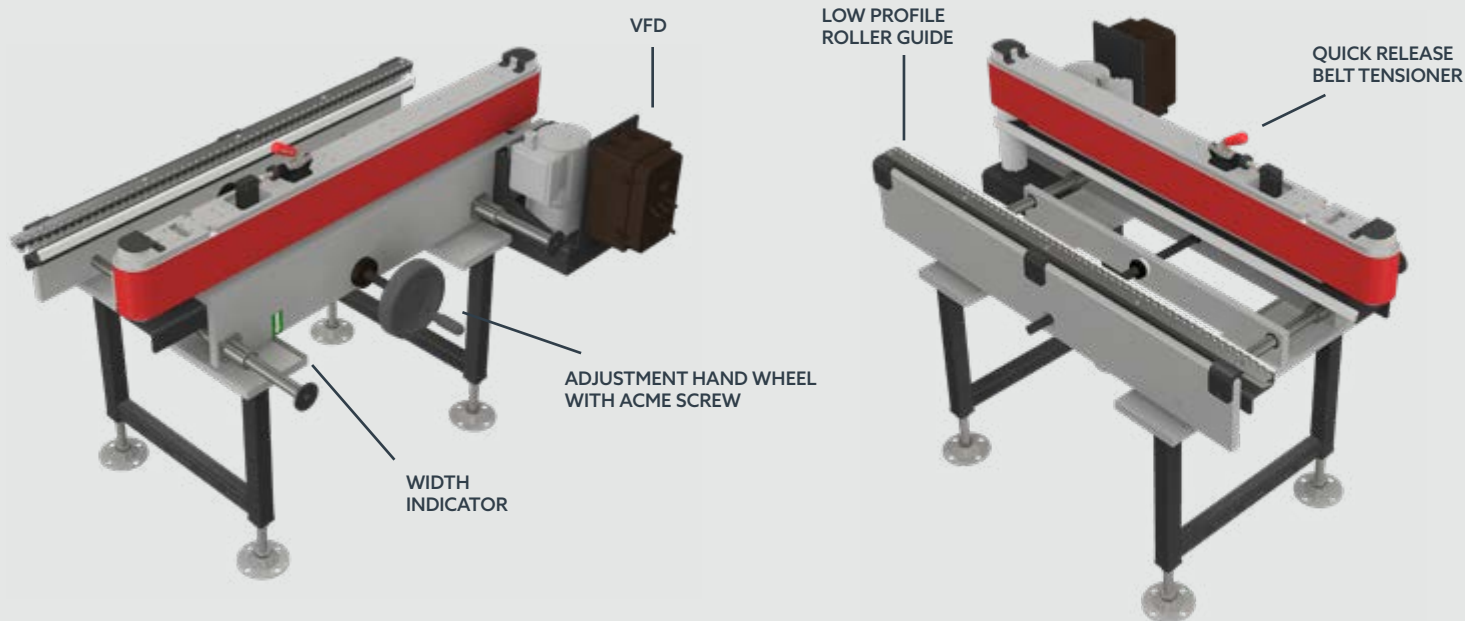

## DIMENSIONS & SPECIFICATIONS

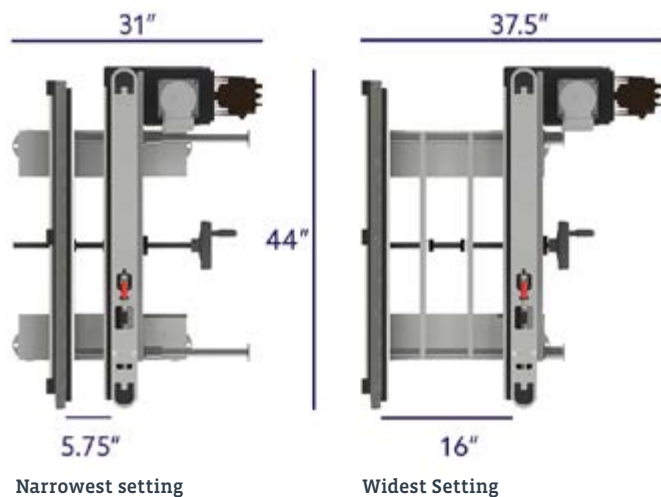

### STANDARD SPECIFICATIONS

Length	44"
Width	31" - 37.5"
Elevation	23" - 29"
Electrical	110v Single Phase 5amp
Case Width Min.	5.75"
Case Width Max.	16"
Speed	20 - 70 fpm

\*Customization Available

SEE THE  
EC-CONVEYOR  
IN ACTION!

